
RFT
Socket for Relay

Shenler







SR20T *1 SR20U
Plastic clip



SRU05-E



SRU08-E



SRU05-ST



SRU08-ST

SR2P
ID tag



AMD
Module


Socket

Model No.	SRU05-E , SRU05-ST	SRU08-E , SRU08-ST
Rated load current	16A	10A
Rated load voltage	300V	
Dielectric strength Between coil and contact	4000V/min	
Dielectric strength Between contacts	2500V/min	
Wiring range(screw terminal)	0.5~2.5mm²	
Operating ambient temperature	-40~+85℃	
Length x Width x Height(mm)	80 x 15.8 x 61.5(-E) , 102 x 16 x 43(-ST)	
Unit weight(g)	35	43


*1 Suited for relays with test button. Accessories not included with socket.

Dimensions(mm)

SRU05-ST SRU08-ST

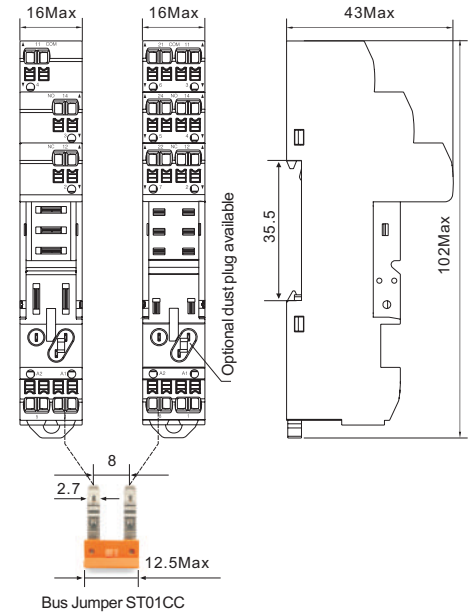


SRU05-E SRU08-E

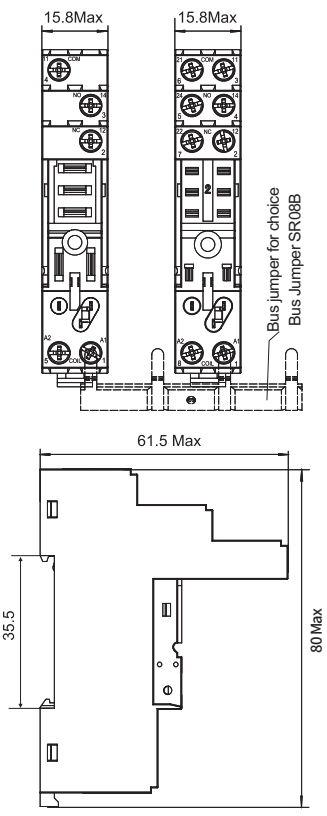


Wiring Diagrams


①⑤ : A1 A2
② : NC
③ : NO
④ : COM



SRU05-E
SRU05-ST

①⑧ : A1 A2
②⑦ : NC
④⑤ : NO
③⑥ : COM





SRU08-E
SRU08-ST