RUB
Socket for Relay

Shenler





SUB08-E



SUB11-E



SU60M
Metal clip

SU3P
ID tag



BMD
Module

Socket

Model No.	SUB08-E	SUB11-E
Rated load current	12A	
Rated load voltage	300V	
Dielectric strength voltage	2500V/min	
Screw torque	1.0Nm	
Wire range (screw terminal)	0.5~2.5mm²	
Operating ambient temperature	-40~+85℃	
Length x Width x Height (mm)	73.2 x 38.2 x 27.2	
Unit weight (g)	50	55

Accessories not included with socket.

Dimensions(mm)

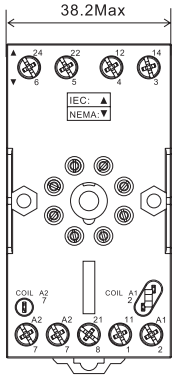

SUB08-E

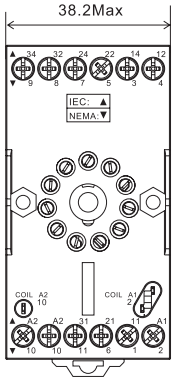

SUB11-E

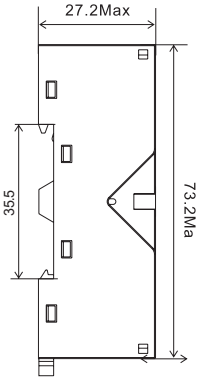

Wiring Diagrams



SUB08-E



SUB11-E