RKL
Socket for Relay



STB08-E



STB14-E



SK36M



ST36M4C

Metal clip



AMD



BMD


Module

Socket


Model No.		STB08-E	STB14-E
Rated load current		16A	
Rated load voltage		300V	
Dielectric strength	Between coil and contact	4000V/min	
	Between contacts	2500V/min	
Screw torque		0.8~1.0Nm	
Wire range (screw terminal)		0.5~2.5mm²	
Operating ambient temperature		-40~+85℃	
Length x Width x Height (mm)		84 x 24.5 x 30	84 x 44.5 x 30
Unit weight (g)		46	78

Accessories not included with socket.


Dimensions (mm)




STB08-E

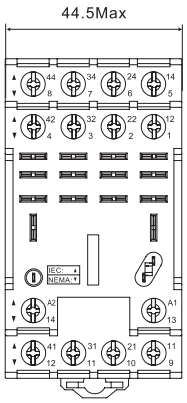

STB14-E

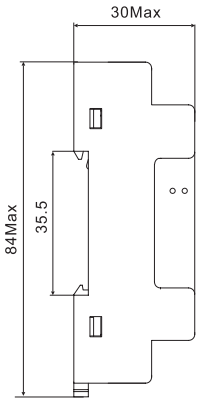


Wiring Diagrams



STB08-E

⑦⑧ : A1 A2
①② : NC
③④ : NO
⑤⑥ : COM



STB14-E

⑬⑭ : A1 A2
①②③④ : NC
⑤⑥⑦⑧ : NO
⑨⑩⑪⑫ : COM