TOWER LIGHT 50 Φ , 62 Φ

AUSPICIOUS

SPECIFICATION

ATL	S	5	—	L	2	3	ROG
1	2	3		4	5	6	7

Item	Symbol	Types
1. Fixing type	ATL ARP APW	Steel rod Round fixing plate Mounting plate
2. Function	S F B FB	Standard type Flash type Buzzer Flash w/Buzzer
3. Diameter	5 6	50 mm φ 60 mm ϕ
4. Bulb type	I L	Incandescent LED
5. Voltage	1 2 12 24	110 VAC 220 VAC 12 VAC/DC 24 VAC/DC
6. Stage	1~5	
7. Color	R O G B W	Red Orange Green Blue White

FEATURES


1. The LED bulbs and incandescent bulbs (BA15 base) are changeable.
2. LED Colors are available in red, orange, green, blue, white.
3. Lens can be arranged in any combinations desired.
4. Tower light with audible alarm is also available.

LAMP SPECIFICATION **(FOR REFERENCES ONLY)**

Type of bulb: BA15S base, incandescent 8W 110VAC 0.06A 220VAC 0.03A 12V AC/DC 0.7A 24VAC/DC 0.35A
Type of bulb: BA15S base, LED lamp Color: Red, Orange, Green, Blue, White 110V AC 0.02A 220V AC 0.02A 12V AC/DC 0.1A 24V AC/DC 0.03A
Buzzer: 90dB at 30cm/24VDC Current: 30mA

MB-16 Metal fixing bracket








RP-16 Round fixing plate

Aluminum rod 16mm φ






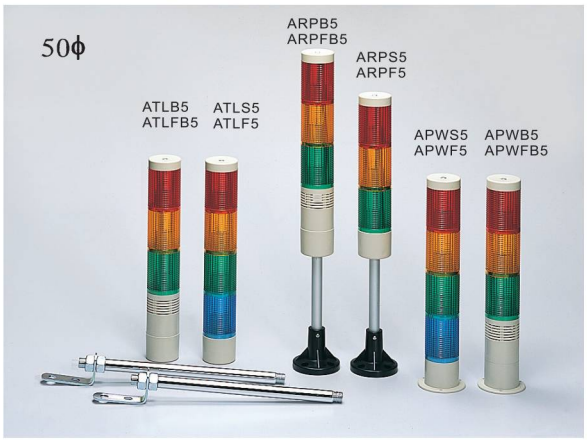

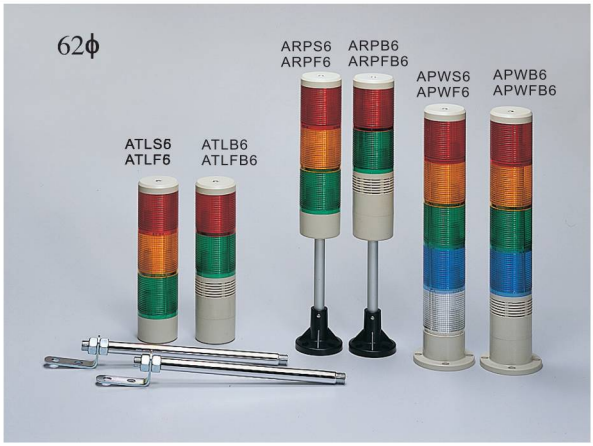


Wiring diagram


Standard type

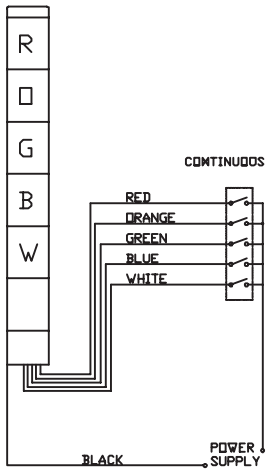

Flash type

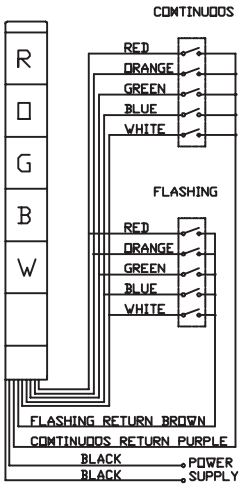

Buzzer type

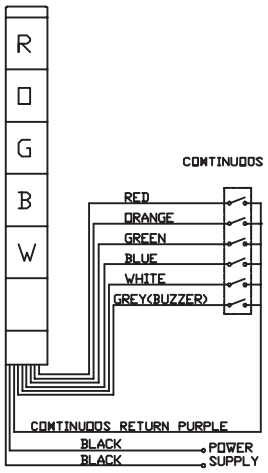

Flash & buzzer type

