RKM&RKE&RKF
Socket for Relay


Shenler



SKB08-E



SKB14-E



SKC08-E



SKC14-E



SK36F
Plastic clip



AMD
Module

SK4P
ID tag




SK36M
Metal clip


Socket

Model No.		SKB08-E SKC08-E	SKB14-E	SKC14-E
Rated load current		12A	10A	
Rated load voltage		300V		
Dielectric strength	Between coil and contact	4000V/min		
	Between contacts	2500V/min		
Screw torque		1.0Nm		
Wiring range (screw terminal)		0.5~2.5mm²		
Operating ambient temperature		-40~+85℃		
Length x Width x Height (mm)		SKB-E 77.5 x 27.2 x 43.2		
		SKC-E 80 x 27.2 x 61.5		
Unit weight (g)		50	56	62


Dimensions(mm)

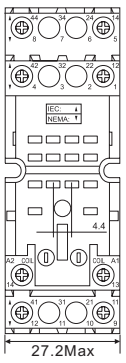


SKB08-E

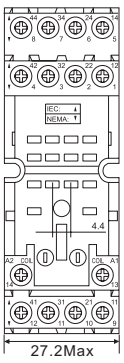


SKB14-E

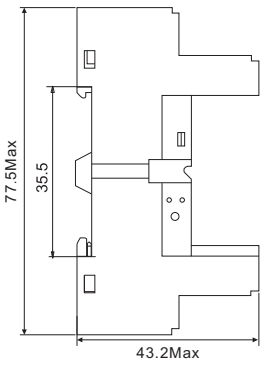


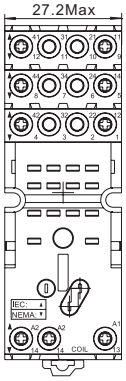

SKC08-E

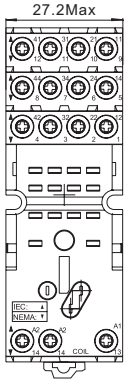


SKC14-E

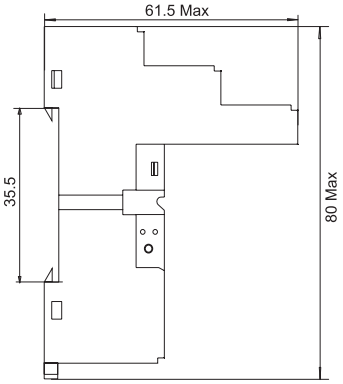


Wiring Diagrams

⑬⑭ : A1 A2
①④ : NC
⑤⑧ : NO
⑨⑫ : COM




SKB08-E

⑬⑭ : A1 A2
①④ : NC
⑤⑧ : NO
⑨⑫ : COM




SKC08-E

⑬⑭ : A1 A2
①②③④ : NC
⑤⑥⑦⑧ : NO
⑨⑩⑪⑫ : COM



SKB14-E

⑬⑭ : A1 A2
①②③④ : NC
⑤⑥⑦⑧ : NO
⑨⑩⑪⑫ : COM



SKC14-E