Shenler





SRB05-E SRB08-E



SR15L
Plastic Clip

SR2P
ID Tag



AMD
Modules



SRC05-P



SR15M
Metal Clip



SRC08-P




SR1520M
Metal Clip

Socket

Model No.		SRC05-P	SRC08-P	SRB05-E	SRB08-E
Rated load current		12A	8A	12A	10A
Rated load voltage		300V			
Dielectric strength	Between coil and contact	4000V/min			
	Between contacts	2500V/min			
Screw torque		-		1.0Nm	
Wiring range(screw terminal)		-		0.5~2.5mm²	
Operating ambient temperature		-40~+85°C			
Length x Width x Height(mm)		SRC05-P/SRC08-P 31.5 x 13 x 13.7			
		SRB05-E/SRB08-E 77 x 15.8 x 43			
Unit weight(g)		10	10	33	37

Accessories not included with socket.

Dimensions (mm)

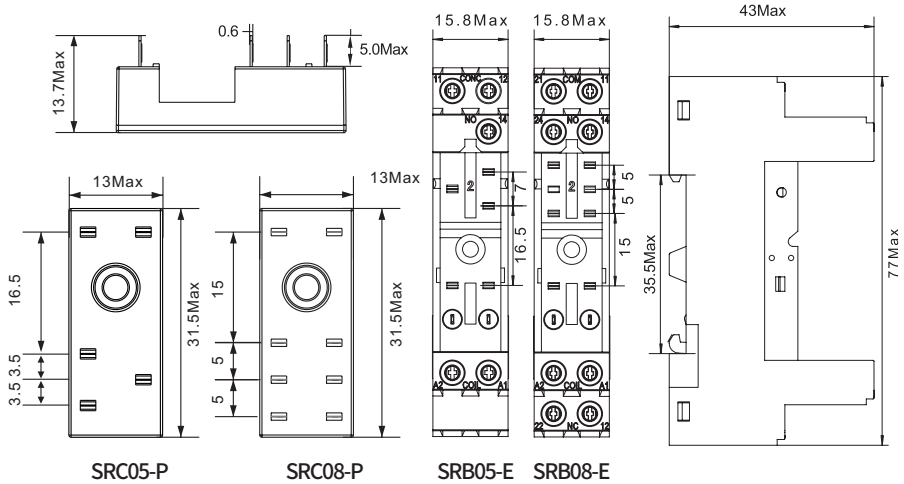


SRC05-P SRC08-P SRB05-E SRB08-E

Wiring Diagrams

①⑤ : A1, A2
② : NC
③ : NO
④ : COM

①⑧ : A1, A2
③⑥ : COM
④⑤ : NO
②⑦ : NC




SRC05-P SRC08-P

Bottom View

①⑤ : A1 A2
② : NC
③ : NO
④ : COM

①⑧ : A1 A2
②⑦ : NC
④⑤ : NO
③⑥ : COM



SRB05-E SRB08-E